

BASE B9000x

1. Technical specifications

- Supply voltage **9-30 V DC**
- Cross section of the connecting wire **0,4÷2,0 mm²**
- Operating temperature range **-10°C ÷ 50°C**
- Humidity **(93 ± 3)% / 25°C**
- Dimensions with base **Ø 100mm h ≤ 12mm**
- Weight **≤ 35g**

2. Mounting the detector

- Choose the place (according to the plans of the project) for the installation of the detector ;
- Mount the base with appropriate fixings ;
- Connect the electrical cables according to the attached diagram (Figure 1);

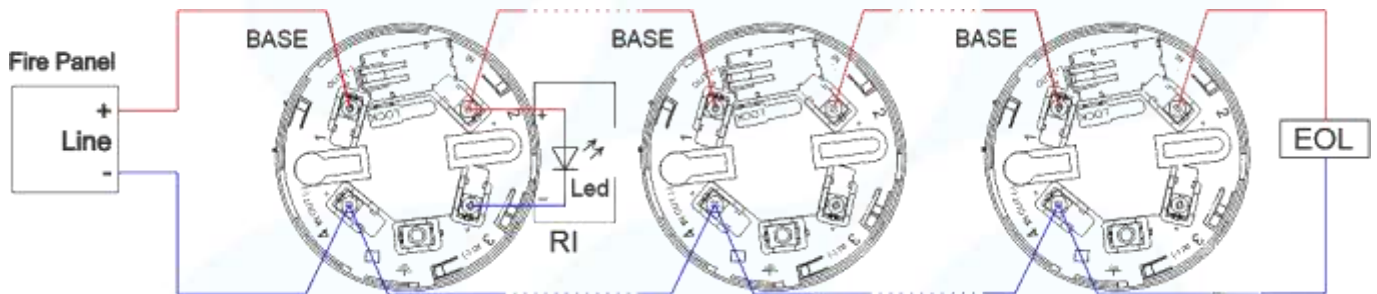


Fig.1

- Place the detector base and rotate clockwise till matching markers;
- If you want to lock detector ::
 - Pre remove the key from the base (Figure 2).
 - Break the plastic at the specified location on the bottom of the sensor (Figure 3).




Fig.2

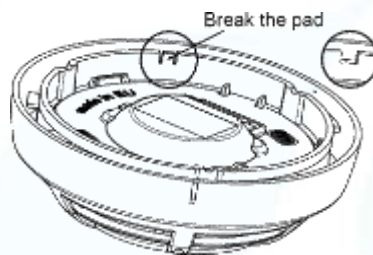


Fig.3




Fig.4

- Place the detector base and rotate it .
- If the detector is locked to the base, to unlock it , insert first the key to the specified location (Fig. 4) and rotate the detector counterclockwise;

The detectors are available with three types of bases:

- **In 9000** - a standard basis;
- **In 9000D** - standard base with diode for recording damage detector down;
- **In 9000R** - standard base with relay output 12V for security panels.