

BASE B9000S

Standard base for detectors D9000 with Indoor Siren for conventional fire alarm panels

1. Technical specifications

– Supply voltage	9-30 V DC
– Sound level	>75dB
– Consumption	≤ 20mA/28V DC
– Cross section of the connecting wire	0,4÷2,5 mm ²
– Operating temperature range	-10°C ÷ 50°C
– Humidity	(93 ± 3)% / 25°C
– Dimensions with base	Ø 100mm h ≤ 12mm
– Weight	≤ 35g

2. Mounting the detector

- Choose the place (according to the plans of the project) for the installation of the detector ;
- Mount the base with appropriate fixings ;
- Connect the electrical cables according to the attached diagram (Figure 1);

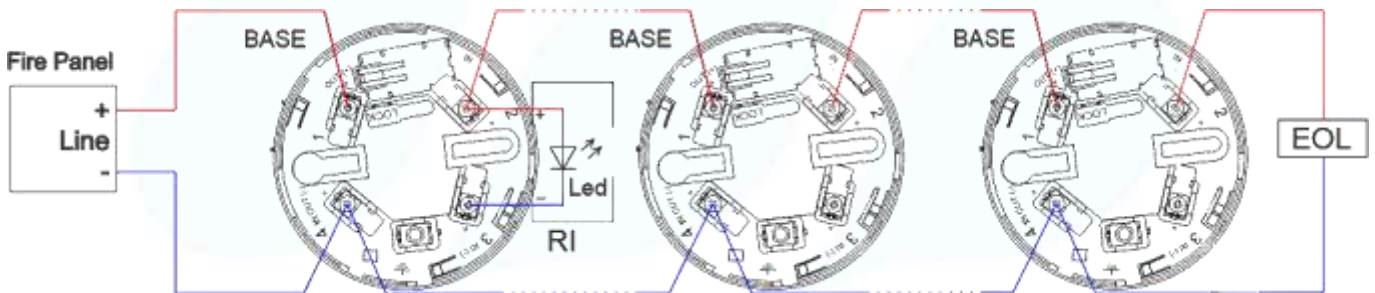


Fig.1

- Place the detector base and rotate clockwise till matching markers;
- If you want to lock detector ::
 - Pre remove the key from the base (Figure 2).
 - Break the plastic at the specified location on the bottom of the sensor (Figure 3).




Fig.2

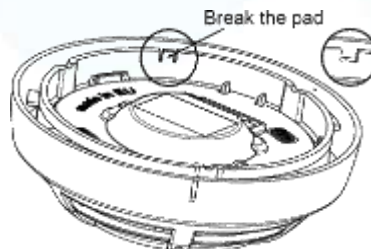


Fig.3




Fig.4

- Place the detector base and rotate it .
- If the detector is locked to the base, to unlock it , insert first the key to the specified location (Fig. 4) and rotate the detector counterclockwise;