


OPERATING INSTRUCTIONS FOR SERVICE PERSONNEL

PANELS FP9000L - 2/4/8

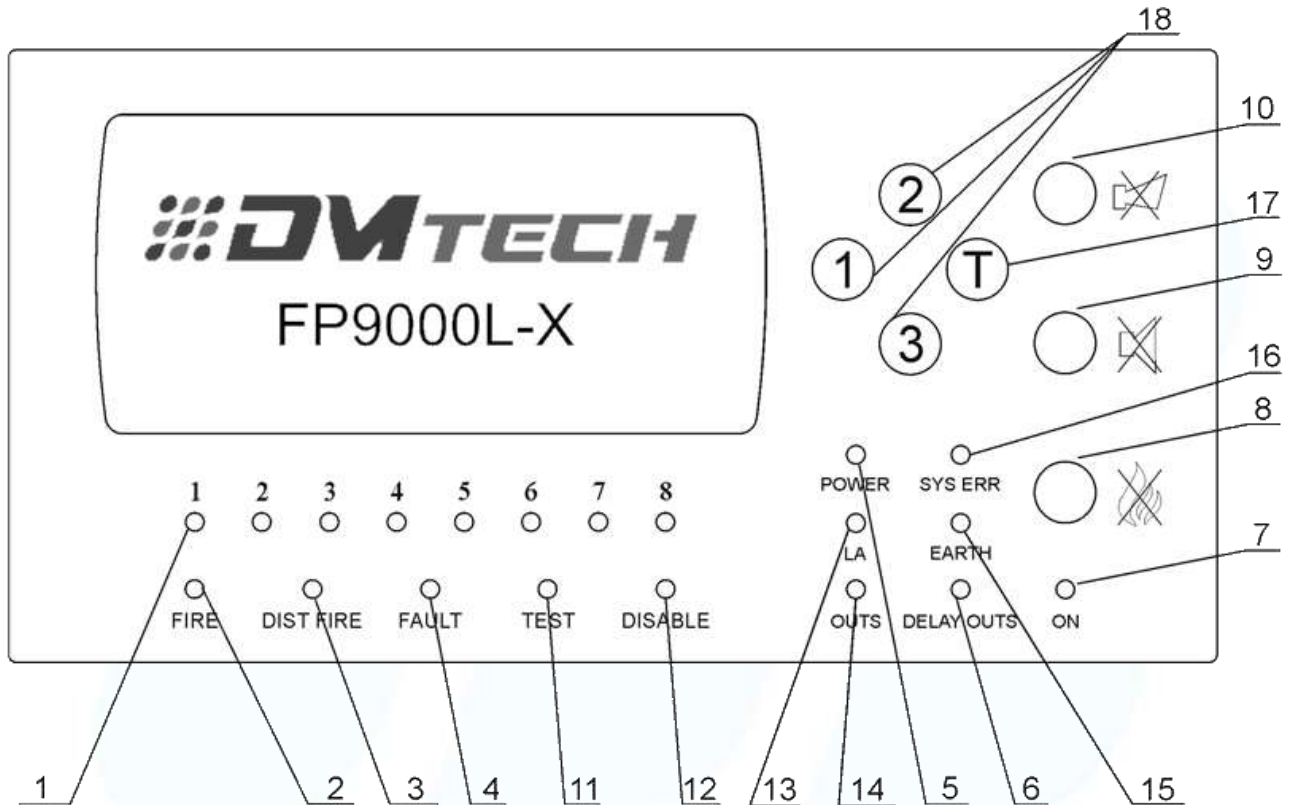

1. Individual fire and line fault indicators;
2. General fire indicator;
3. Remote fire indicator for network operation.
4. General fault indicator;
5. Mains or battery power failure indicator;
6. Indicator at set time delay of outputs;
7. Power on indicator;
8. "Reset fire" button;
9. Button "Stop sound panel";
10. Button "Stop sirens";
11. Indicator when Line Test is on;
12. Indicator when Line Restriction and/or Output is on;
13. Access level indicator. Illuminates when access level 2;
14. Indicator when outputs are faulted and disabled;
15. Ground wire fault indicator;

16. System failure;

17. Test indication button;

18. Coded toggle buttons:

- Access level: 1-2-3 combination to switch from level 2 to 1 and vice versa.
- 2-2-2-2 combination to enter/exit Line Disabled mode
- Enter/Exit Line Test mode combination: 3-3-3-3: 3-3-3-3

1. DUTY MODE

This is the panel's normal mode. There are no faults or fires on the lines. The power on indicator (item 7) is lit. The on-delay indicator on the outputs (pos. 6) may also be lit.

2. Personnel action in case of a "DANGER" signal

In the event of a fault, the panel sounder is activated.

The indicators are used to locate the fault - lack of mains or battery power, fault in the relevant line (the individual line indicator lights up yellow) , fault in a controllable output, etc. The sound signal is stopped by pressing the **"Stop sound panel"** button (pos 9).

Contact the service technician for follow-up instructions. Lack of mains power is a self-recovering fault and the panel will settle into "Standby" when power is restored.

3. Personnel action in case of „FIRE“ signal

- Задействана е звуковата сигнализация на панела и светят с червена светлина, общия индикатор за пожари и на съответната линия.
- The sound signal is stopped by pressing the "Stop panel sound" button (pos. 9).
- Go to the location guarded by the respective zone and check for an occurred event. If there is in fact a fire, proceed according to the "Instructions for personnel action in case of fire".
- If the panel activation is "false" the fire detectors and out indicators are inspected and the cause of the activation is sought.
- When the time delay on the exits expires, the sirens are activated. They can be stopped by pressing the "Stop sirens " button (pos. 10).
- Returning the panel to Duty mode is done by pressing the "Reset Fire" button (pos. 8).