


# OPERATING INSTRUCTIONS FOR THE OPERATOR STAFF

## PANEL FP9000A

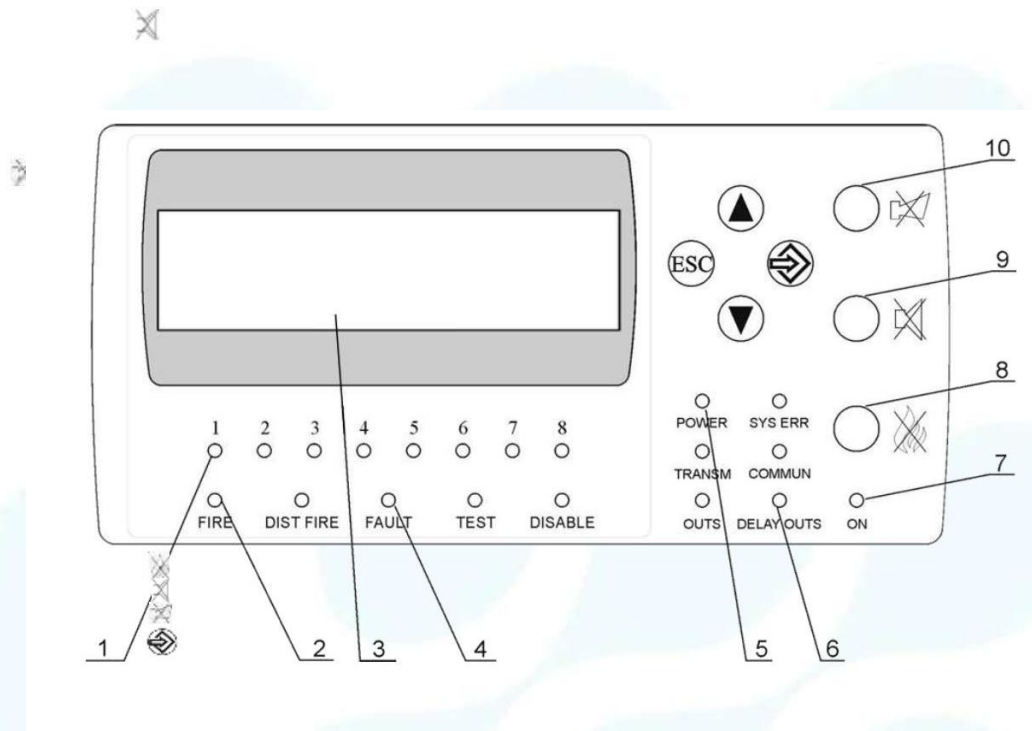

1. Individual indicators for fire and damage by zones
2. General fire indicator
3. Display
4. General Fault Indicator
5. Power failure indicator – mains and battery
6. Exit Delay Time Entered Indicator
7. General indicator for the presence of power
8. Button "Reset Fire "
9. Button "Stop Sound Panel "
10. "Stop sirens" button
11. "Select/Enter" button

## 1. "STANDBY MODE" on the panel

This is the usual panel mode. There were no damages or fires on the lines.  
On the display (pos. 3) is written "SECURITY" and the astronomical time. Saint power indicator (pos. 7). The indicator light can also be on programmed output delay (pos. 6).

## 2. Personnel action in case of a signal for "DAMAGE"

In case of damage, the audible alarm on the panel is activated.  
The display shows the exact fault – lack of mains or battery power supply, damage in the respective area (the individual indicator of the zone lights up with a yellow light), damage to a controllable outlet and others.  
Stopping the beep is done by pressing a button "Stop Sound panel" (item 9).  
Contact the service technician for follow-up instructions.  
The lack of mains power is a self-repairing fault and the panel will established in "Standby mode" when the power is restored.

## 3. Staff action in case of a "FIRE" signal

The audible alarm on the panel is activated and the red indicator of the the relevant area. The display shows information about the area in which it is fire, a text message about the location of the the fire alarm and the time left until the sirens turn on.

- Stopping the beep is done by pressing a button "Stop Sound panel" (pos. 9).
- Go to the place indicated by the panel and check for an event.  
If in reality there is a fire, act according to the "Instruction for action staff in the event of a fire".
- If the triggering of the panel is "false", the fire alarms are inspected and the exported indicators, and a reason for the triggering is being sought.
- When the time expires, the sirens are turned on at the exits. They can be stopped by pressing the "Stop sirens" button (pos. 10), taking into account enter the password and confirm yourself by pressing the "Select/Enter" button.
- Returning the panel to Standby mode is done by pressing a button „Reset fire" (pos. 8) by entering the password and confirming it by pressing the "Select/Enter" button.